


# ZBench 120VP2




















### **Technical specifications**

- Mobile soundproofing table for GC/LC-MS with structure in high resistance aluminum profile.
- 13 mm HPL for the cladding and 20 mm thick Fundermax Resistance for the work surface, both with resistance to chemical products.
- Four lifting wheels with integrated fixing feet for greater stability.






#### Noise enclosure for 2 vacuum pumps

- Two lockable doors for easy access to the vacuum pump for oil change.
- Compartment with 50 mm thick multi-layer acoustic insulation designed to soundproof motors, compressors and vacuum pumps. Reduces more than 85% of noise perception.
- Anti-vibration system: a stainless-steel tray with silent blocks to absorb the vibrations produced by the vacuum pump.














#### Ventilation system and access for pipe



- 4 ultra-quiet, long-lasting (150.000 hours) and easily replaceable fans.
- 3 flexible plastic desk grommets for vacuum pump tubes and 2 flexible plastic desk grommets for drain tubes.
- 12V-5A power supply to connect to the 230V/50Hz network with safety connector.

#### Power switch and temperature alarm against overheating

• If a temperature higher than that recommended by the pump manufacturer is reached inside the noise enclosure, a red LED lights up and an acoustic signal is activated.

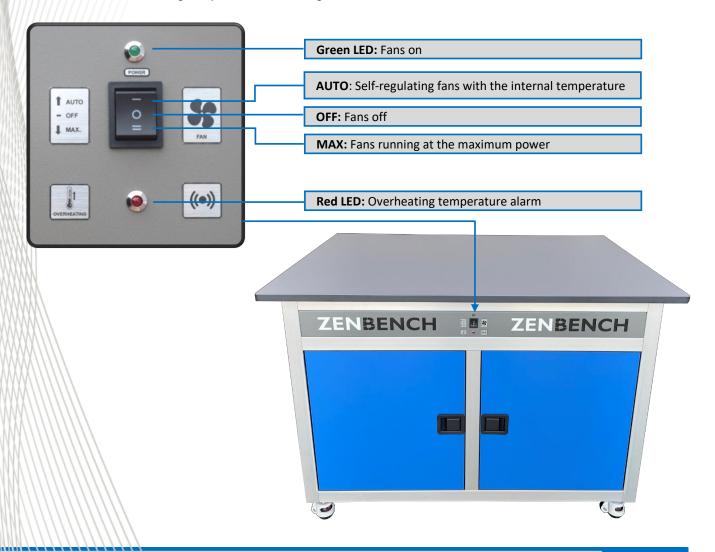









Dimensions of ZBench 120VP2	Width (cm)	Depth (cm)	Height (cm)
External dimensions of bench	120	88	82
Internal dimensions of noise enclosure	100	66	60



## Compatibility with the main brands on the market

Compatibility guide for Zbench 120VP2						
TECHNIQUE	AGILENT	SCIEX	THERMO	WATERS		
MS	6550 QTOF 6490 6495A /B	QTrap 6500 Citrine TQ 6500	TSQ Quantiva	Xevo TQ-S		







