


ZBench 120VP2XL




















Technical specifications

- Mobile soundproofing table for GC/LC-MS with structure in high resistance aluminum profile.
- 13 mm HPL for the cladding and 20 mm thick Fundermax Resistance for the work surface, both with resistance to chemical products.
- Four lifting wheels with integrated fixing feet for greater stability.






Noise enclosure for 2 vacuum pumps

- Two lockable doors for easy access to the vacuum pump for oil change.
- Compartment with 50 mm thick multi-layer acoustic insulation designed to soundproof motors, compressors and vacuum pumps. Reduces more than 85% of noise perception.
- Anti-vibration system: a stainless-steel tray with silent blocks to absorb the vibrations produced by the vacuum pump.














Ventilation system and access for pipe



- 4 ultra-quiet, long-lasting (150.000 hours) and easily replaceable fans.
- 3 flexible plastic desk grommets for vacuum pump tubes and 2 flexible plastic desk grommets for drain tubes.
- 12V-5A power supply to connect to the 230V/50Hz network with safety connector.

Power switch and temperature alarm against overheating

• If a temperature higher than that recommended by the pump manufacturer is reached inside the noise enclosure, a red LED lights up and an acoustic signal is activated.

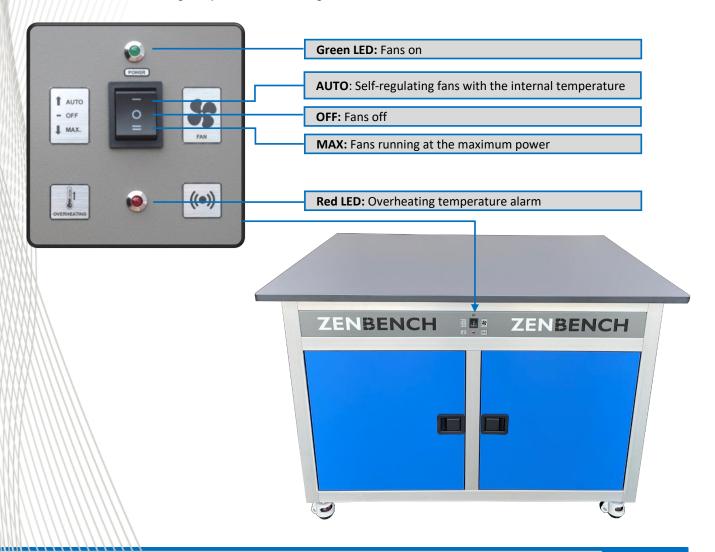









| Dimensions of ZBench 120VP2 | Width (cm) | Depth (cm) | Height (cm) |
|--|------------|------------|-------------|
| External dimensions of bench | 120 | 105 | 82 |
| Internal dimensions of noise enclosure | 100 | 85 | 60 |



Compatibility with the main brands on the market

| Compatibility guide for Zbench 120VP2XL | | | | |
|---|-----------------------|------------|--|--|
| TECHNIQUE | THERMO | WATERS | | |
| LC/MS | Orbitrap Exploris 480 | Xevo TQ-XS | | |







